

RMC1

RMC1TS-63

RMC2

RMGQ

RMQ1

RMQ6













RMQ5

RMK

RMS1

RMD2



| 极数 | 宽度mm   | 额定电流A | 产品型号            |
|----|--|-------|-----------------|
| 1P |  18 | 32    | RMC1G-100 32/1  |
|    |  18 | 63    | RMC1G-100 63/1  |
|    |  18 | 100   | RMC1G-100 100/1 |
| 2P |  36 | 32    | RMC1G-100 32/2  |
|    |  36 | 63    | RMC1G-100 63/2  |
|    |  36 | 100   | RMC1G-100 100/2 |
| 3P |  54 | 32    | RMC1G-100 32/3  |
|    |  54 | 63    | RMC1G-100 63/3  |
|    |  54 | 100   | RMC1G-100 100/3 |
| 4P |  72 | 32    | RMC1G-100 32/4  |
|    |  72 | 63    | RMC1G-100 63/4  |
|    |  72 | 100   | RMC1G-100 100/4 |

### 用途

- 带负荷接通、分断或隔离电路

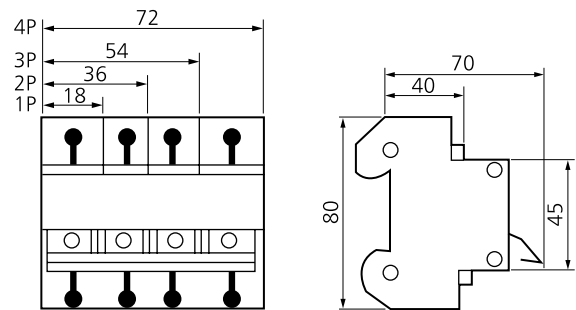
### 使用环境

- 环境温度：-5°C~+40°C
- 海拔：≤2000m
- 空气相对湿度：≤95%
- TH35mm标准安装轨安装

### 技术参数

|          |                       |         |
|----------|-----------------------|---------|
| 符合标准     | IEC 60947-3 GB14048.3 |         |
| 额定工作电压   | AC230V/400V           |         |
| 短时承载电流能力 | 24In/1s               |         |
| 机械寿命     | 10000次                |         |
| 电气寿命     | 额定电流(A)               | 电气寿命(次) |
|          | 32                    | 3000    |
|          | 63                    | 2000    |
|          | 100                   | 1000    |

### 外形尺寸



### 接线能力

- 50mm<sup>2</sup>及以下导线